

Automatic hanging or cutting:


## **NEW LEVEL OF EFFICIENCY DUE TO REVOLVING HEAD WITH TWO NOZZLES.**



**LINKING  
TWICE AS  
EFFICIENT**

## 100 % **PROCESS RELIABILITY** GUARANTEES TOP QUALITY!

- PVLH 228 for extremely high linking capacity and automatic hanging.
- PVLS 125 for extremely high linking capacity and perfect cutting.

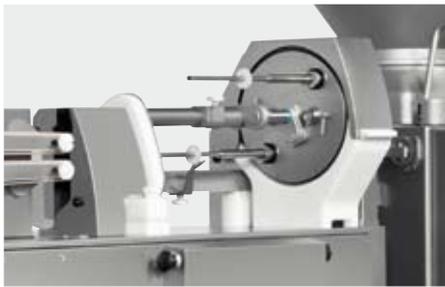

**PVLS 125/ PVLH 228 linking unit**

- New linking unit with revolving head and 2 nozzles.
- For a significant reduction in non-production times (possible to change a casing in less than 2 seconds).
- Increased output up to 2,000 portions/minute with peel-off and collagen casings, up to 1,000 portions/minute with natural casings.
- Top product quality due to gentle linking.



**PVLS 125 voiding belt**

- New voiding belt, especially effective for processing poor quality natural casings.
- Can be set to any lengths from 85 mm.
- For a large calibre range (16 - 40 mm), without voider vanes having to be replaced.



**New PVLS 125 cutting method**

- Innovative cutting system with 2 belts for creating a defined gap between the portions.
- Results in clean, precise portion cutting.
- High production output up to 1,500 portions/minute.

**Albert Handtmann**  
Maschinenfabrik GmbH & Co. KG

Hubertus-Liebrecht-Str. 10-12  
D-88400 Biberach/Riss  
Deutschland  
Tel.: + 49 (0) 73 51 / 45 - 0  
Fax: + 49 (0) 73 51 / 45 - 15 01  
info.machines@handtmann.de  
www.handtmann.de

**handtmann**  
*Ideas for the future.*